

VISIONAUTE

presents

SOFIE

The surveillance robot




THIS CAMERA ON ZOOM TURRET OFFERS A WHOLE RANGE OF BUILT-IN FUNCTIONS MEANING IT CAN EFFICIENTLY MEET WITH YOUR MONITORING REQUIREMENTS.



Directional light of your choice
 - halogen : white light
 - infrared : for discreet monitoring


**260 X
DIGITAL**

Power zoom
 26x optical zoom,
 260x digital zoom.




360° non-stop rotation

Thanks to a system of rotary joints with rubbing blocks and rings, the camera performs a 360° lateral non-stop rotation to facilitate the control (no cable apparent).




«Alert» system

In the event of a technical alert provided by a robot or a presence detector, the camera is directly pointed to the area to be monitored (previously programmed) and controls a recording.



Wiper on lens

This allows for remote cleaning of the camera's field of range (highly appreciated function if the camera is positioned at a height)



Upgradeable

To rail and/or multi-camera.



Sony camera with Ex-view sensor
 This new generation of sensors gives rise to outstanding image quality.



Sound pickup
 (with rotation and travel cut out)
 Appreciated when monitoring.




Sealed assembly (IP66)
 System fully watertight from water run-off and splashes (sockets with plugs).

**ZOOM X1
11s /360°**

**ZOOM X26
6mn40s /360°**

«Automove» system

This function is provided to adjust the rotation speed to the zoom position




Control choice

VISIONAUTE remote control
 Joystick
 I.VISIONAUTE.COM internet interface

80 preposition memories

Thanks to this function, shot positions can be saved and by pressing a button on your remote control, **SOFIE** will automatically position itself on the area concerned. This function is valid in rotation, horizontally or vertically as well as for rail-mounted travel.

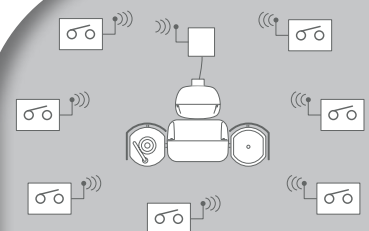

Alarm contact option

SOFIE can receive up to 7 alarm contacts by radio-frequency transmission – max. distance 200 m.




HOW TO RECEIVE THE IMAGE

THESE DIFFERENT LINK SOLUTIONS CAN BE ASSOCIATED IN ORDER TO MEET WITH THE MAJORITY OF SCENARIOS.



ANTENNA

For a link from 200 m to 5 km at sight. Ideal for reception on screen.



CABLE

For a link up to a max. of 300 m.



PLC

The powerline communication solution is designed to convey a digital signal over a distance of 200 m thereby avoiding having to lay cables or an antenna*.



WiFi

Allows for a link from one point to another and/or in a circle around your receiving area/point.



INTERNET

You can view your site to be monitored from anywhere in the world via internet*.



SATELLITE

Allows for a broadband internet connection when ADSL is not possible without the need to share the telephone line with the internet connection*.

*with IP option



INTERNET DIGITAL DEVELOPMENT

SIMPLE AND USER-FRIENDLY SOFTWARE

TO VIEW YOUR SITE TO BE MONITORED VIA THE INTERNET, **VISIONAUTE** HAS AN EASY-TO-USE PLATFORM AT YOUR DISPOSAL. WWW.IVISIONAUTE.COM

HOME PAGE

✓ To log in to your site, just enter your name and your password (provided by **VISIONAUTE**) then click on “log in”.



home page



conventional mode




full-screen mode

YOUR SITE TO BE MONITORED

- ✓ You have the choice of viewing your site in **conventional mode** or **full-screen mode**.
- ✓ You control all the cameras of your installation.
- ✓ This software is designed for you to **record** your video sequences or to take photos.
- ✓ You can also **program** recording times.
- ✓ You can note information on a **notepad** in order to share this with the other users authorised on your video surveillance system.



CHOICE OF RECEIVER IMAGE

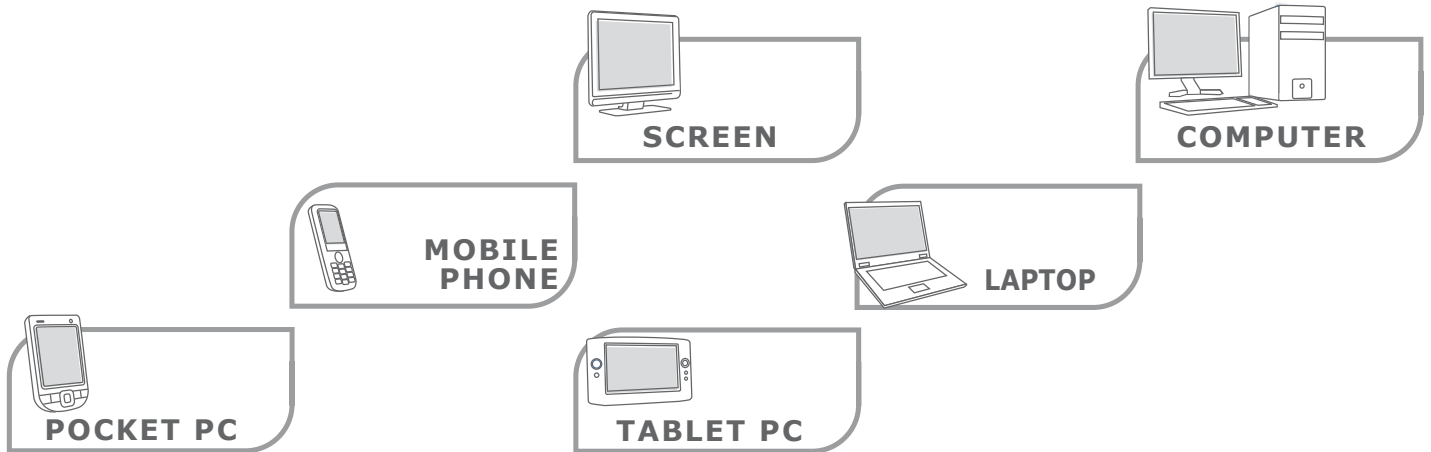


SPECIFICATIONS

Programmable colour power camera

Compatible	Multi-protocol
Lens	x26 optical, x10 digital zoom F3.5 to 91 mm
Resolution	460 lines (PAL)
Sensor	SONY Ex-View
White balance	AUTO, ATW outdoor, indoor manuel WB, One push WB
Gain	Manual/Auto
Operating temperature	-10°c to +60°c
Video output	VBS : 1Vp-p, Y/C output
Audio output	1
DATAS	
7 alarm inputs	Radio - Frequency: 433 MHz
Contact controlled with light	1
Power supply	230V
Power consumption	100 W white light, 55 W infrared
Weight	± 5,5 Kg
Dimensions	170 mm (D) x 420 mm (L) x 250 mm (H)

OPTIONAL ACCESSORIES:

- Wall bracket
- Ceiling bracket
- Corner bracket
- Radio alarm emitter
- 7 alarm radio receiver



SOFIE

stems from over twenty years' experience in video surveillance

DISTRIBUTED BY:

VISIONAUTE
Advance

FACTORY: PARC DU TUMULUS - 12130 PIERREFICHE - FRANCE
Phone: +33 (0)5 65 70 49 79 - Fax: +33 (0)5 65 47 40 17
SHOWROOM: 2, RUE DU PLATEAU - 93330 NEUILLY/MARNE - FRANCE
Phone: +33 (0)5 65 70 49 79 - Fax: +33 (0)5 65 47 40 17
www.visionaute-adv.com